

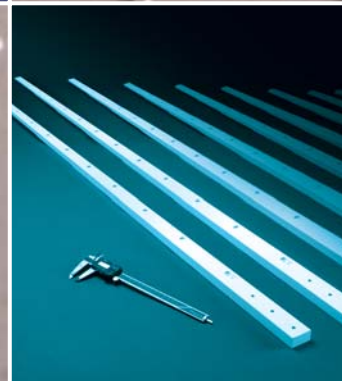


**COORSTEK**  
*Amazing Solutions.®*

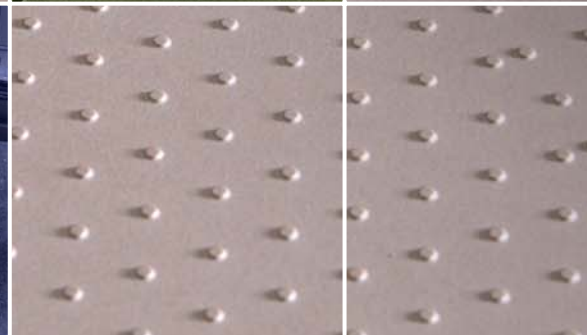

**ADVANCED  
CERAMICS**

**FOR FLAT  
PANEL DISPLAY**

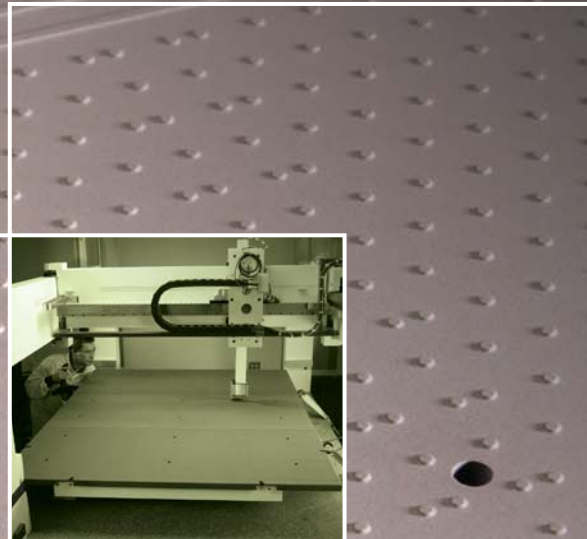

## ADVANCED CERAMICS COMPONENTS FOR FLAT PANEL DISPLAY MANUFACTURING EQUIPMENT

### Technical Ceramics Experts

CoorsTek provides critical components for Flat Panel Display (FPD) manufacturing from a range of specialized high-purity technical ceramics. Our experts help you choose the best design and material for optimal performance and component life.

### Why Specify Ceramic Components?

CoorsTek ceramics provide superior performance in severe-service application environments. Benefits include:

- Excellent corrosion resistance in plasma and chemical etching environments – our PlasmaPure™ high-purity alumina is engineered to outperform standard ceramic materials in corrosive etch applications
- Superior dielectric strength which helps prevent electrical arcing during machine operation
- StatSafe™ ESD safe ceramic materials prevent static charge buildup during glass transport
- Longer component life – CoorsTek ceramics outperform engineering plastics in most plasma etch applications
- Thermal stability – components extremely stable in wide range of operating and idle temperatures


### Critical Components for a Variety of FPD Applications

We provide a great variety of thermally stable, corrosion resistant, and high-purity ceramic components for typical FPD applications:

- Etch
  - Focus, shield, and insulator plates – single piece and segmented construction
  - Ceramic covers
  - Buffer plates
- CVD
  - Insulator shield rings
  - Guide bushings and support shafts
  - Ceramic liners
- Ultra-flat vacuum chucks
  - Up to 2.5 meters square
  - Low surface contact designs
  - Low reflectivity or high transmissivity
- Multi-purpose components
  - Various pins, screws, plates, frames, & windows
  - Ceramic clamps and bushings
  - End effectors/substrate handling components

### Manufacturing Facilities Across Three Continents

CoorsTek supplies technical ceramics from 17 state-of-the-art manufacturing facilities in North America, Europe, and Asia. Call **+1.503.693.2148** (USA) or **+82.31.783.7357** (Korea) for assistance.



Property	Units	Test	StatSafe™ ADC	StatSafe™ ZDC	StatSafe™ ZDC-W	AD-96	AD0-96	FG-995	AD-995	PlasmaPure™ AD-998	AD-999
			Al <sub>2</sub> O <sub>3</sub>	ZrO <sub>2</sub>	ZrO <sub>2</sub>	Nom. 96%	Nom. 96%	Nom. 98.5%	Nom. 99.5%	Nom. 99.8%	Nom. 99.9%
Density	gm/cc	ASTM-C 20	3.85	5.75	5.91	3.72	3.81	3.80	3.90	3.93	3.94
Color	–	–	Black	Black	White	White	Brown	White	Ivory	Ivory	Ivory
Flexural Strength (MOR), 20° C	MPa (psi X 10 <sup>3</sup> )	ASTM-F417	300 (43)	600 (87)	650 (94)	358 (52)	385 (56)	375 (54)	379 (55)	390 (58)	414 (60)
Elastic Modulus, 20° C	GPa (psi X 10 <sup>3</sup> )	ASTM-C848	370 (54)	200 (29)	200 (29)	303 (44)	354 (50)	350 (51)	370 (54)	370 (54)	386 (56)
Compressive Strength, 20° C	MPa (psi X 10 <sup>3</sup> )	ASTM-C773	2060 (300)	1200 (174)	1310 (190)	2068 (300)	2450 (375)	2500 (363)	2600 (377)	2700 (390)	2930 (425)
Hardness	GPa	Rockwell 45N	83	82	82	78	81	82	83	83	85
Fracture Toughness, K <sub>Ic</sub>	MPa m <sup>1/2</sup>	Notched Beam	4 - 5	7 - 9	7 - 9	4 - 5	3 - 4	4 - 5	4 - 5	4 - 5	4 - 5
Thermal Conductivity, 20° C	W/m °K	ASTM-C408	25	5	3.5	24.7	24.7	27.5	30.0	30.0	31.0
CTE, 25-1000° C	1X 10 <sup>-6</sup> /°C	ASTM-C372	8	9	10	8.2	8.2	8.2	8.2	8.2	8.2
Thermal Shock Resistance, ΔT <sub>c</sub>	°C	NOTE 3	200	300	300	250	250	200	200	200	200
Maximum Use Temperature	°C	NO-LOAD COND.	500	500	500	1700	1700	1700	1750	1750	1750
Volume Resistivity, 25° C	Ohm-cm	ASTM-D1829	10 <sup>6</sup> - 10 <sup>7</sup>	10 <sup>6</sup> - 10 <sup>7</sup>	10 <sup>6</sup> - 10 <sup>7</sup>	> 10 <sup>14</sup>	*	> 10 <sup>14</sup>	> 10 <sup>14</sup>	> 10 <sup>14</sup>	> 10 <sup>14</sup>
Volume Resistivity, 500° C	Ohm-cm	ASTM-D1829	–	–	–	4 x 10 <sup>9</sup>	*	2 x 10 <sup>10</sup>	2 x 10 <sup>10</sup>	1 x 10 <sup>11</sup>	3.3 x 10 <sup>11</sup>
Volume Resistivity, 1000° C	Ohm-cm	ASTM-D1829	–	–	–	1 x 10 <sup>8</sup>	*	2 x 10 <sup>8</sup>	2 x 10 <sup>8</sup>	3 x 10 <sup>8</sup>	1.1 x 10 <sup>9</sup>

**Note:** The chart is intended to illustrate typical properties. Engineering data is representative. Property values vary somewhat with method of manufacture, size, and shape of part. This data is not to be construed as absolute and does not constitute a warranty for which we assume legal responsibility.

CoorsTek and Amazing Solutions are registered trademarks of CoorsTek, Inc. PlasmaPure and StatSafe are trademarks of CoorsTek, Inc. OpX is a servicemark of CoorsTek, Inc.

**CoorsTek North America  
FPD Products Group**  
555 N.E. 53rd Avenue  
Hillsboro, OR 97124 USA


+1.800.821.6110 toll free  
+1.503.693.2148 tel  
+1.503.648.1501 fax

### CoorsTek Korea – FPD Group

#1402 Poonglim Building  
225-1, Seohyun-Dong, Bundang-Gu  
Sungnam-City, Gyeonggi-Do, Korea

+82.31.783.7357 tel  
+82.31.783.7353 fax

fpd@coorstek.com  
www.coorstek.com



TECHNOLOGY  
MATERIALS  
MANUFACTURING  
ASSEMBLY