


# Funnel Dimensions (Büchner)

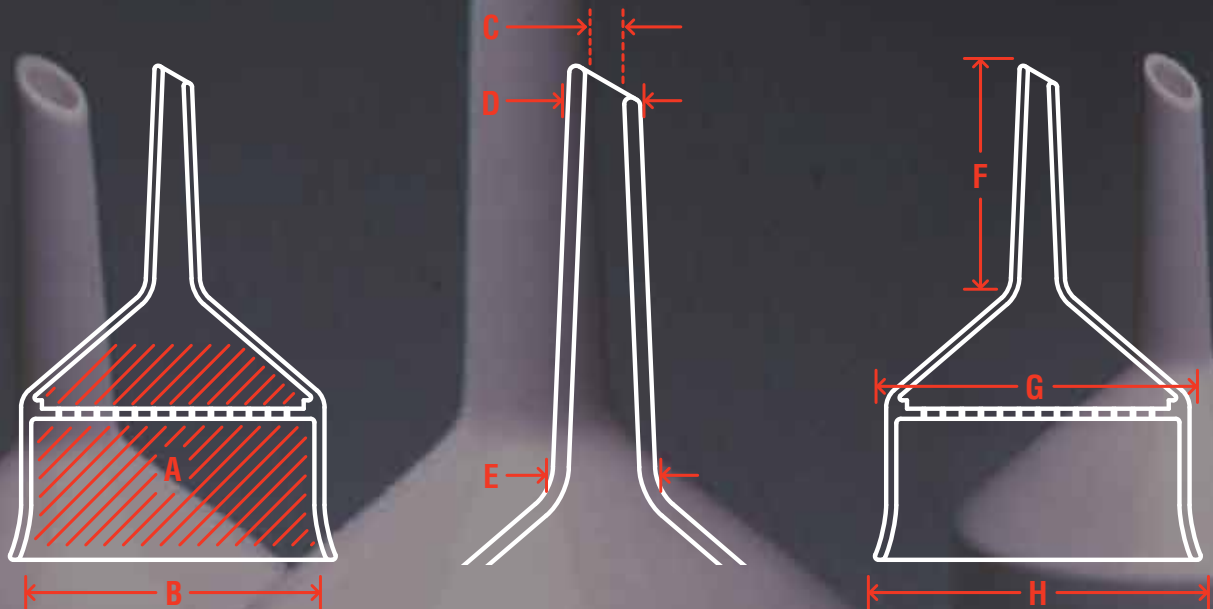

Item #	mL Capacity (A)	Paper Filter Diameter (B)	Stem ID (C)	Top of Stem OD (D)	Stem Base OD (E)	Height of Stem (F)	Top OD (G)	Funnel Base OD (H)
60238	2	(13)	0.104 (2.60)	0.195 (5.32)	0.198 (4.97)	1.584 (40.24)	0.767 (19.50)	0.767 (19.50)
60239	30	(35-40)	0.210 (5.30)	0.515 (13.10)	0.390 (10.00)	1.600 (40.70)	1.926 (49.00)	1.926 (49.00)
60240	87	(50-55)	0.195 (5.00)	0.580 (14.90)	0.430 (10.70)	1.700 (43.40)	2.441 (62.00)	2.441 (62.00)
60242	186	(70)	0.260 (6.60)	0.600 (15.70)	0.455 (11.60)	2.350 (59.65)	3.230 (82.00)	3.230 (82.00)
60243	320	(90)	0.312 (7.80)	0.750 (19.08)	0.551 (14.01)	3.011 (76.49)	3.879 (98.50)	3.879 (98.50)
60244	550	(110)	0.394 (10.00)	0.845 (21.50)	0.600 (15.30)	3.500 (88.85)	4.670 (118.50)	4.670 (118.50)
60245	700	(110-124)	0.380 (9.70)	0.900 (23.00)	0.690 (18.00)	3.825 (97.00)	5.311 (135.00)	5.311 (135.00)
60246	1060	(142-150)	0.393 (10.00)	1.033 (26.24)	0.788 (20.03)	3.937 (99.98)	6.495 (165.00)	6.495 (165.00)
60247	1860	(185)	0.410 (10.40)	1.119 (28.00)	0.857 (21.70)	4.400 (115.00)	7.973 (202.50)	7.973 (202.50)
60248	4500	(240)	0.490 (12.40)	1.188 (30.20)	0.973 (24.71)	6.149 (156.19)	10.669 (271.00)	10.669 (271.00)

Engineering data is representative. Property values vary somewhat with method of manufacture, size, and shape of part. Any suggested applications are not made as a representation or warranty that the material will ultimately be suitable for such applications. The customer is ultimately responsible for all design and material suitability decisions. Data contained herein is not to be construed as absolute and does not constitute a representation or warranty for which CoorsTek assumes legal responsibility. Any warranty or representation for which CoorsTek is responsible shall be subject to a separately negotiated agreement. CoorsTek and Amazing Solutions are registered trademarks of CoorsTek, Inc.

← Hole size in stopper should be between these two values. →



Dimensions are approximate, measurements as follows:

inches (millimeters)